



ST PRO

16:9 Fine Pixel Pitch LED Display




Curved & 90° Splicing



10000:1 High contrast



Thickness:27.3mm,weight 3.78kg/panel

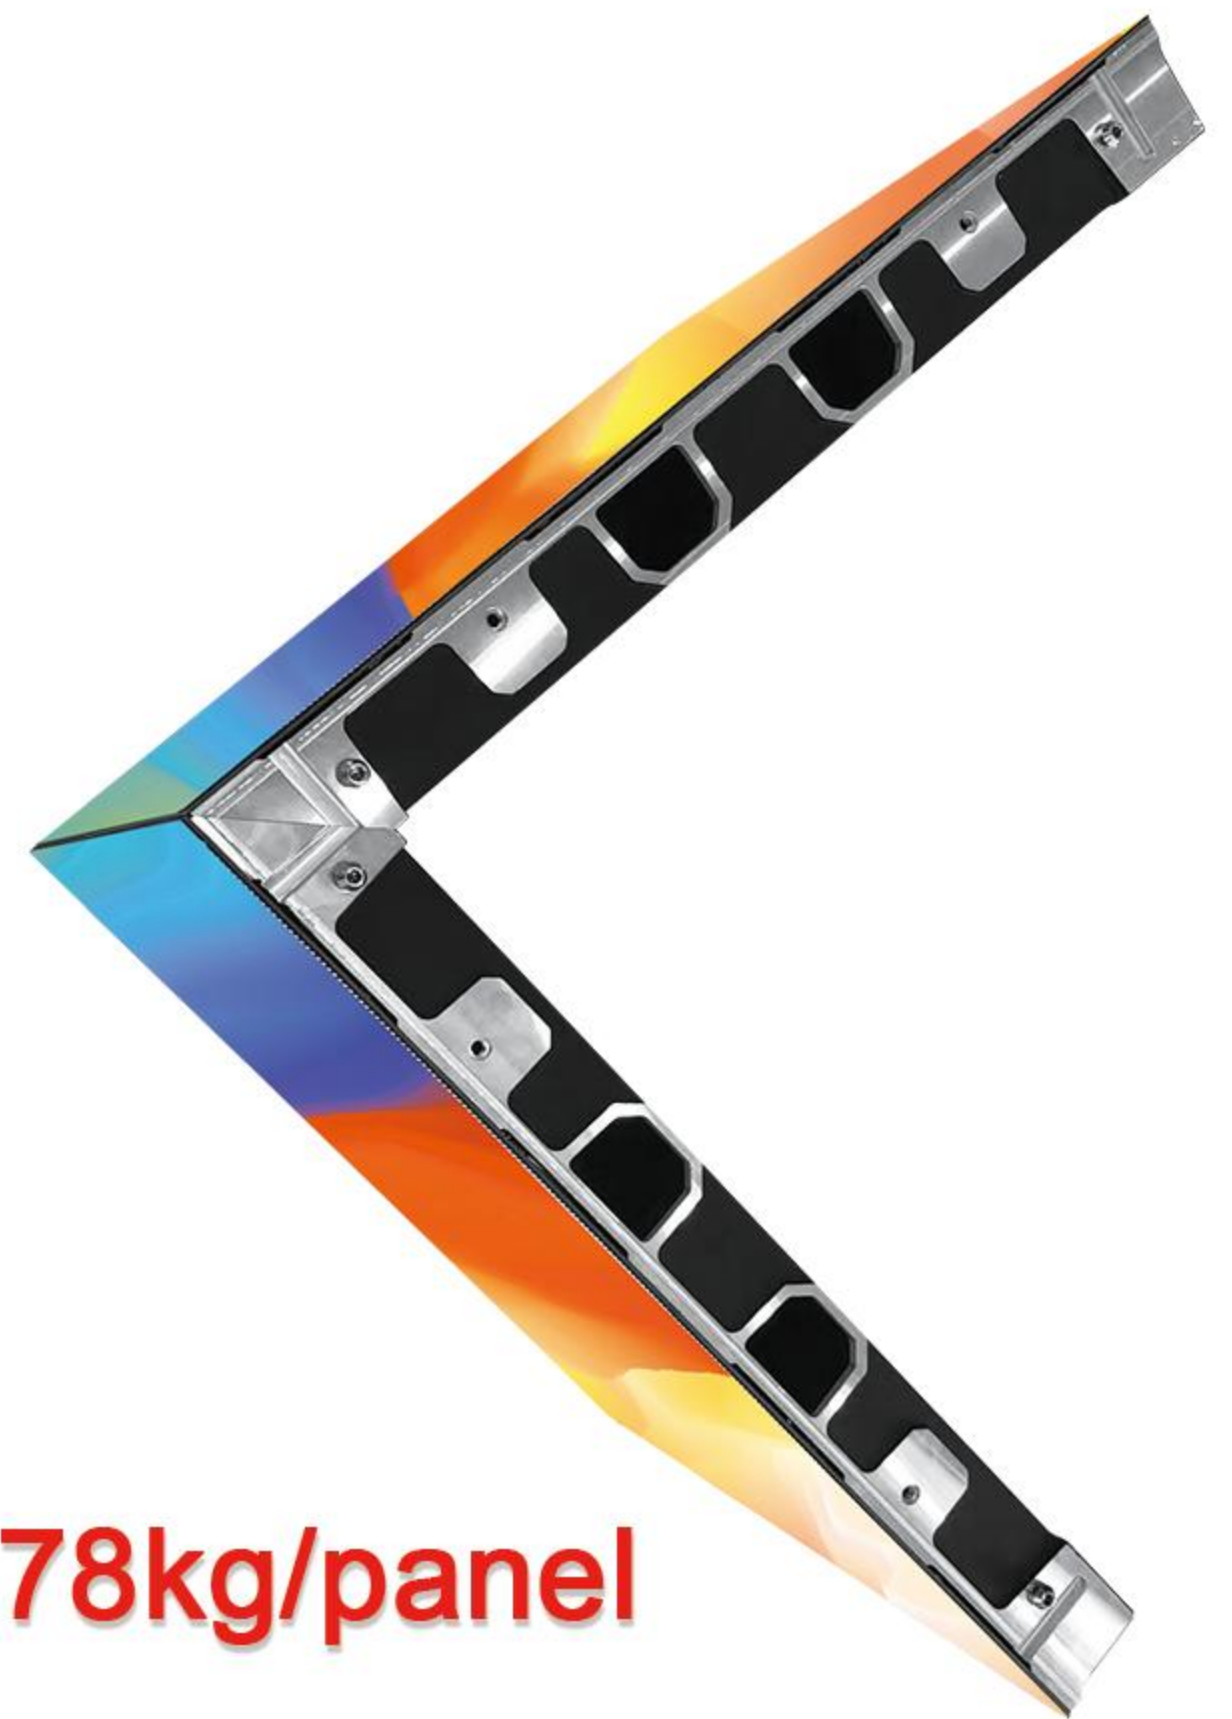


Simple, of course MPLED !

 <https://www.mpled.com>

 Email: mpled@mpled.cn

ST Pro series

16:9 Fine Pixel Pitch LED Display

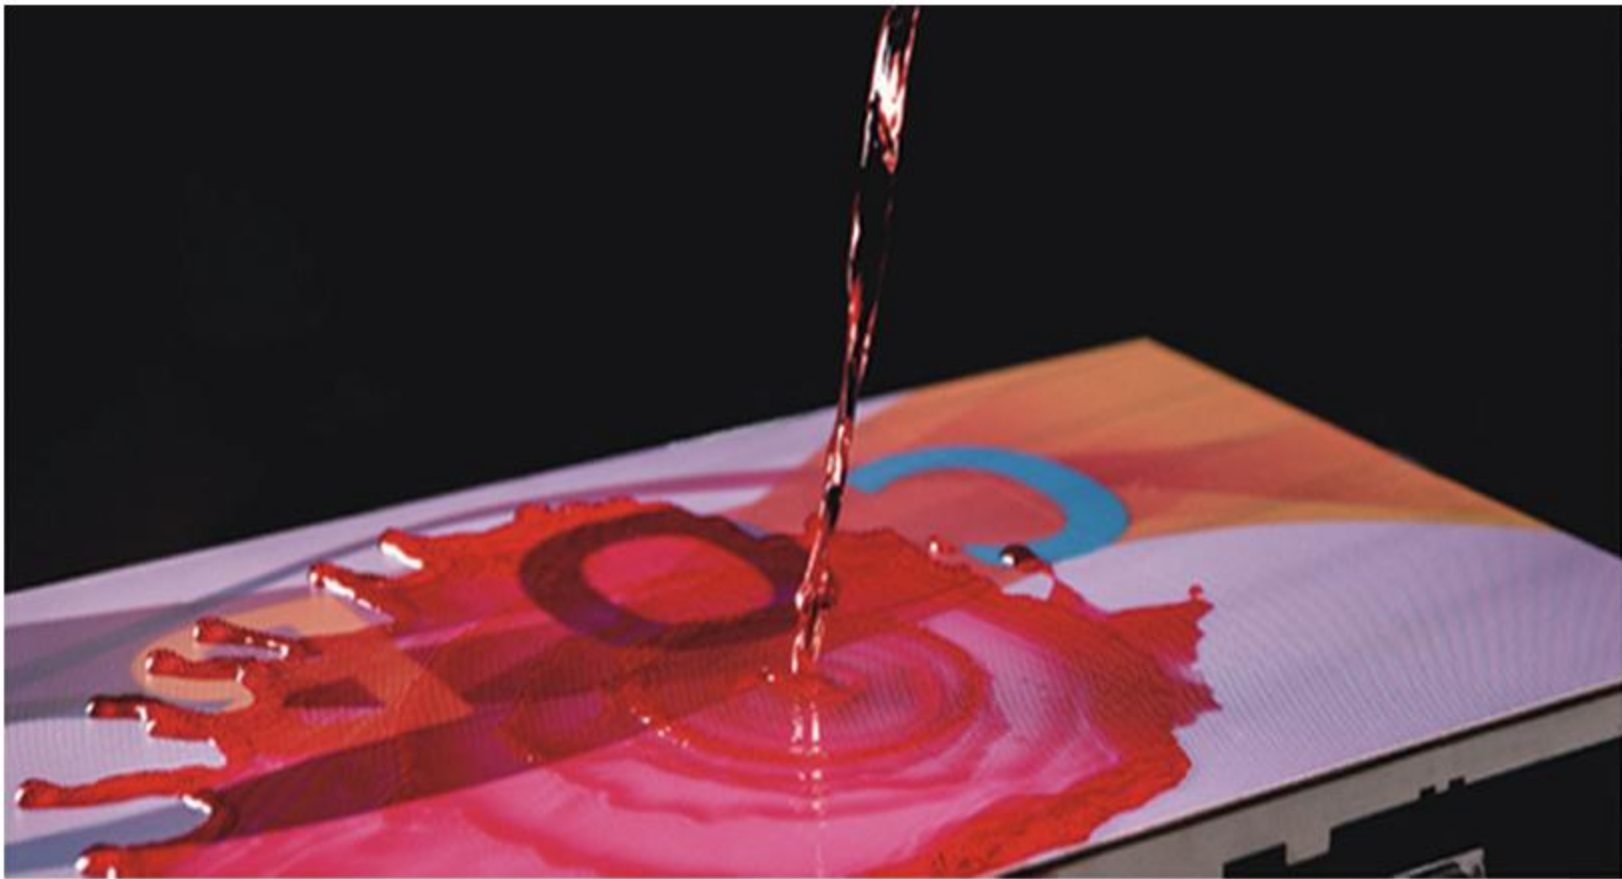

Sealed and Highly Protected

Integrated die-casting, fully sealed and non-porous

SMD & COB Technology (Optional)



Dust Proof



Anti-oil Stain



Anticollision



Antistatic



Antioxisation

Parameter	P0.93Common Cathode	P1.25	P1.56	P1.87
LED Lamp	SMD/Flip COB			
Brightness(cd/m²)	COB:500~600	600~800	600~800	SMD:600~800
Refresh rate (Hz)	≥2880Hz	≥3840Hz		
Panel size(mm)	600*337.5*27.3	600*337.5*27.3	600*337.5*27.3	600*337.5*27.3
Viewing distance(M)	1m-100m			
Box weight (kg)	3.78kg			
Max/Ave (W/m²)	SMD:Max :600W/m², Ave :180W/m² / COB:Max 500W/m², Ave :150W/m²			
IP grade	IP30 / IP54			
Contrast ratio	Contrast ratio:8000:1 / Contrast ratio:10000:1			
Grayscale (bit)	16bit			
Frame frequenc (Hz)	50 / 60Hz			
Viewing angle (Deg)	SMD :140°-160° / COB :170°-170°			
Install/Maintenance way	Maintenance way: Front maintenance; Install way: Front or rear install			
Work environment	Temperature -20℃~60℃, Humidity 10%RH~95%RH			
Lifespan/MTBF (H)	Lifespan≥100000,MTBF ≥50000			