

B O R N F O R H I G H - E N D C O M M E R C I A L S C R E E N



WS Series

Superb slim and cable free

Marketing Value:

- Never Black Screen
- Intelligent and smart module
- Cloud monitoring
- World Class Calibration Technology



Features



Ultra slim & light:
28mm thickness, 20kg/m² weight.



Integrated modular design realizes
cable-free connection.



Support wall mounted directly
or by simple bars.




Seamless splicing with high
precision: 0.05mm, far higher industry
0.15mm standard.

MPLED—Make LED Display Simple

WS series

Superb slim and cable free

B O R N F O R H I G H - E N D C O M M E R C I A L S C R E E N

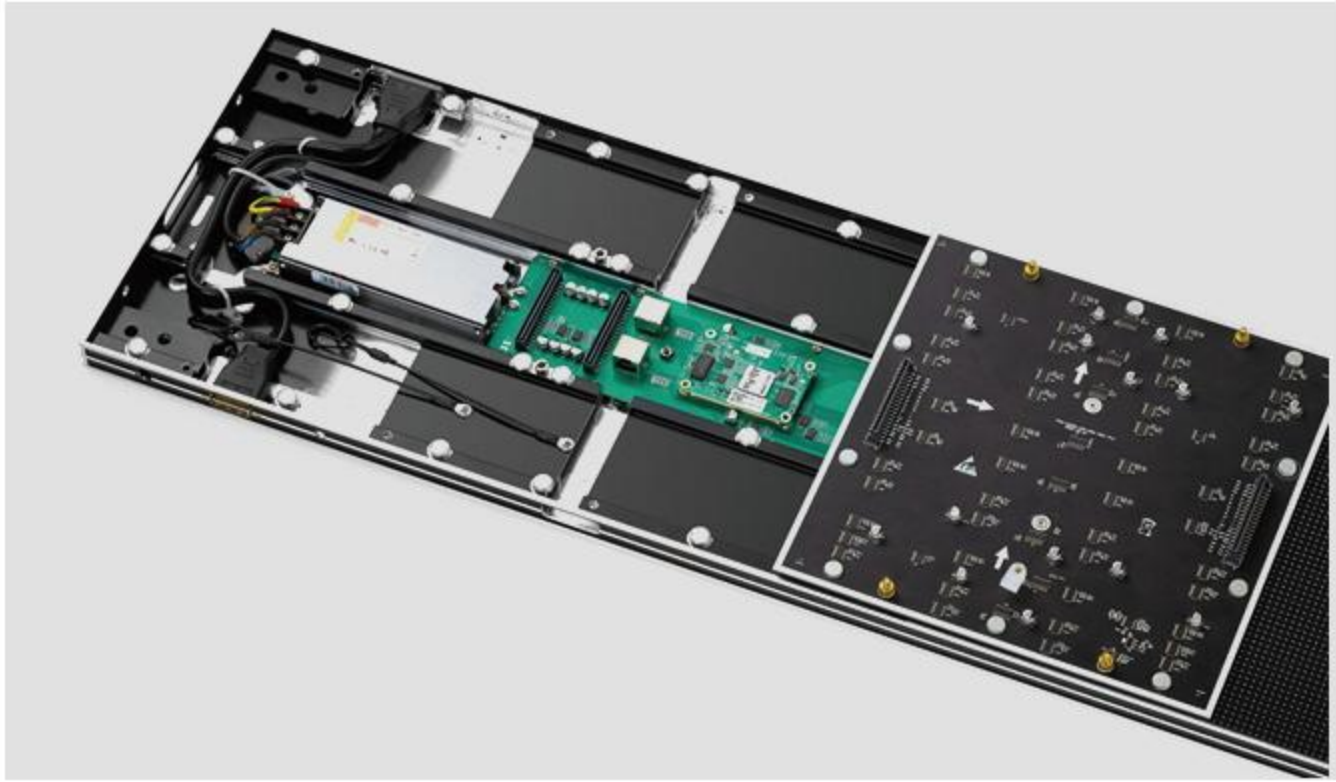

Parameter	P1.56	P1.95	P2.6	P3.91
LED Configuration	SMD1212	SMD1515	SMD1515	SMD2121
Pixel Density(dots/m²)	410881dots/m²	262144dots/m²	147456dots/m²	65536dots/m²
Module size(mm)	250x250mm			
Panel size(mm)	1250x250x28mm,1000x250x28mm,750x250x28mm optional			
Cabinet weight(kg)	20kg/m²			
IP Rating	IP40			
Brightness(nits)	Indoor application 400–1000nits,Semioutdoor:3000–4000nits adjustable			
Viewing Angle(H/V)	Horizontal:160degree,Vertical:140degree			
Gray Scale(bit)	16bit			
Max/Ave Power Consumption	480/150 (W/m2)			
Refresh	3840Hz			
Input Voltage(V)	110V–240V 50/60Hz			
Work environment	Temperature –20℃–60℃, 10%–90% Humidity			
Lifespan	Lifespan≥100000,MTBF ≥50000			